

## ACK1202neo


### Two-way Loudspeaker System

The ACK1202neo is a 12", light weight, high SPL, two way full range speaker with clear and bright sound. Unit configuration: 1×12" high efficiency neodymium mid-bass unit, 1×1" exit throat 44mm neodymium polyimide diaphragm HF driver with 90°×40° rotatable horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.

### Features

- High quality unit configuration, high strength plywood housing
- Small size, light weight, easy handling and fixed installation
- Multi-hanging points and support, easy and quick operation
- Applications: large-scale indoor sound reinforcement, multifunction halls, high-end hotel clubs, touring, band reinforcement and monitor speaker

### Overall dimensions

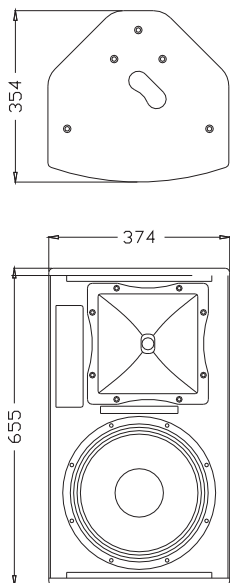

### Technical specifications

FREQUENCY RESPONSE	55Hz-18kHz
DRIVERS	1×12"(300mm)/3" voice coil LF 1×1"(25mm)/ 1.7"voice coil HF
RATED POWER	1200W RMS,4800W peak
SENSITIVITY	97 dB 1 watt/1 metre
MAXIMUM SPL	122 dB continuous,128 dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6 dB)	90°×40°
CROSSOVER	2.5 kHz passive
CONNECTORS	2×Speakon NL4
DIMENSIONS	(W)374mm×(H)655mm×(D)354mm
WEIGHT	17kg/pc

