

AC8"koax1"

Two-way loudspeaker system


The AC8"koax1" is a compact, 8" LF driver and 1" exit HF driver, 2-way, highly weather-resistant full range loudspeaker with high SPL, the body is made of engineering plastic injection molding. The system conforms to IP56 international standard.



FEATURES

- Pass IP56 testing, meet all-weather use
- The cabinet is made of polymer compound injection molding
- Coaxial point sound source
- Horn-loaded design
- Applications: outdoor restaurants, bars, parks, near-filed sound reinforcement of scenic areas, houseboats and seashores (customized)

Overall dimensions

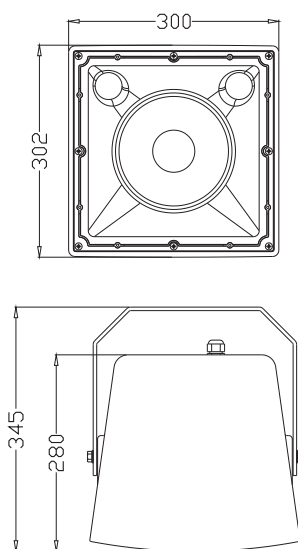

Technical specifications

FREQUENCY RESPONSE	80Hz-18kHz
DRIVERS	1×8" (200mm)/2" voice coil LF 1×1" (25mm)/1.4" voice coil HF
POWER	600W RMS, 2400W peak
SENSITIVITY	96 dB 1 watt/1 metre
MAXIMUM SPL	118 dB continuous, 124dB peak
IMPEDANCE	8 ohms nominal
DISPERSION(-6 dB)	80° × 80°
CROSSOVER	2.5 kHz passive
DIMENSIONS	(W)300mm×(H)302mm×(D)345mm
WEIGHT	10kg/pc

