

ACK2502neo


Two-way Loudspeaker System

The ACK2502neo is a dual 15", light weight, high SPL, two way full range speaker with bright and powerful sound. Unit configuration: 2×15" high power neodymium mid-bass unit, 1×2" exit throat 75mm neodymium titanium diaphragm HF driver with special designed horn. The cabinet is made of multilayer composite plywood with wear-resistant polyurea paint.

Features

- High quality unit configuration, high strength plywood housing
- Light weight, easy handling
- High power output
- Applications: indoor and outdoor sound reinforcement in full range, multifunction halls

Overall dimensions

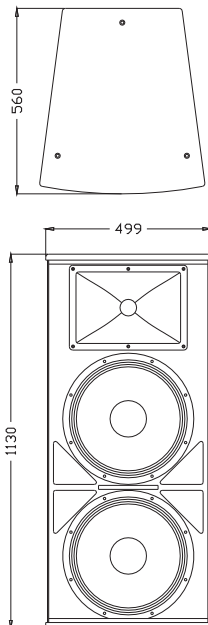

Technical specifications

FREQUENCY RESPONSE	45Hz-18kHz
DRIVERS	2×15"(385mm)/4" voice coil LF 1×2"(50mm)/ 3"voice coil HF
RATED POWER	2400W RMS,9600W peak
SENSITIVITY	101 dB 1 watt/1 metre
MAXIMUM SPL	132 dB continuous,138 dB peak
IMPEDANCE	4 ohms nominal
DISPERSION(-6 dB)	90 ° ×50 °
CROSSOVER	1.5 kHz passive
CONNECTORS	2×Speakon NL4
DIMENSIONS	(W)499mm×(H)1130mm×(D)560mm
WEIGHT	50kg/pc

